

RL50 & RL20




This compact but powerful flood light is a true innovation combining practicality and aesthetics. With highly efficient LED engine and precise optical control, greater lighting performance adds the value to its exterior appearance. Multiple mounting methods enable this fixture to be installed in any given environment.




Optional photo control

Optional Kelvin color* with adder.

Dimensions

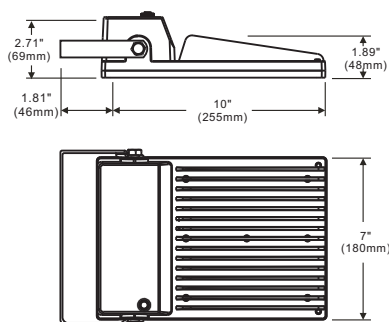

Line Drawing



Features

- UL and CUL listed for wet locations
- Solid construction die-cast aluminum body
- UV stabilized powder coated finish

- IP65
- Optional photo control with adder
- Finish - Bronze. Color option with adder

Specification

Model No.	System watts	Lumen Output	Color	MA	Input Voltage	CRI	Starting Temp	Equivalent
RL50-120-03	52	5469lm**	5000K	1260MA	120~277V	70+	-40°C	250W MH
RL20-120-03	22	1753lm**	5000K	480MA	120~277V	70+	-40°C	100W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Powered by **CREE** LEDs



IP65

RHYNO LED LIGHTING SOLUTIONS INC.

Halifax • Nova Scotia • Tel: 902.425.LEDs (5337) • Fax: 902.832.2258

E-mail: Sales@RhynoLED.ca • Website: www.RhynoLED.ca